

Installation Guide

Decking that performs



Grizzly Decking is an innovative interlocking system designed for docks, marinas, walkways, porches, and more.

Crafted from durable polypropylene, it contains no wood fibers, eliminating the risk of rot, warping, or splintering. Engineered with a unique honeycomb pattern, Grizzly Decking allows sunlight and water to pass through, preserving vegetation and reducing wave force for greater stability.

Its slip-resistant surface makes it a safe and reliable choice for marine environments, residential spaces, and high-traffic areas.

Built for strength, safety, and longevity.

Pre-installation

Codes & Standards

- Always comply with local building codes and follow any guidelines required by local authorities.

Safety

- Wear appropriate protective gear, including safety glasses and work boots, throughout installation.

Joist Spacing


- Joists should be installed at 16" on center for optimal support.

Fasteners

- For wood framing: use #10-305 2.5" stainless steel pan head screws.
- For non-wood applications: use #10-305 2.5" stainless steel pan head self-tapping screws.
- No pre-drilling is required. Grizzly Decking panels are pre-molded and countersunk for easy installation.
- Secure each panel by driving screws through the panel into the frame.
- Do not over tighten, as this allows for natural expansion and contraction.

Gapping Guidelines

- Grizzly Decking panels will naturally expand and contract with temperature changes.
- Leave a small gap between panels and at all ends to accommodate movement.

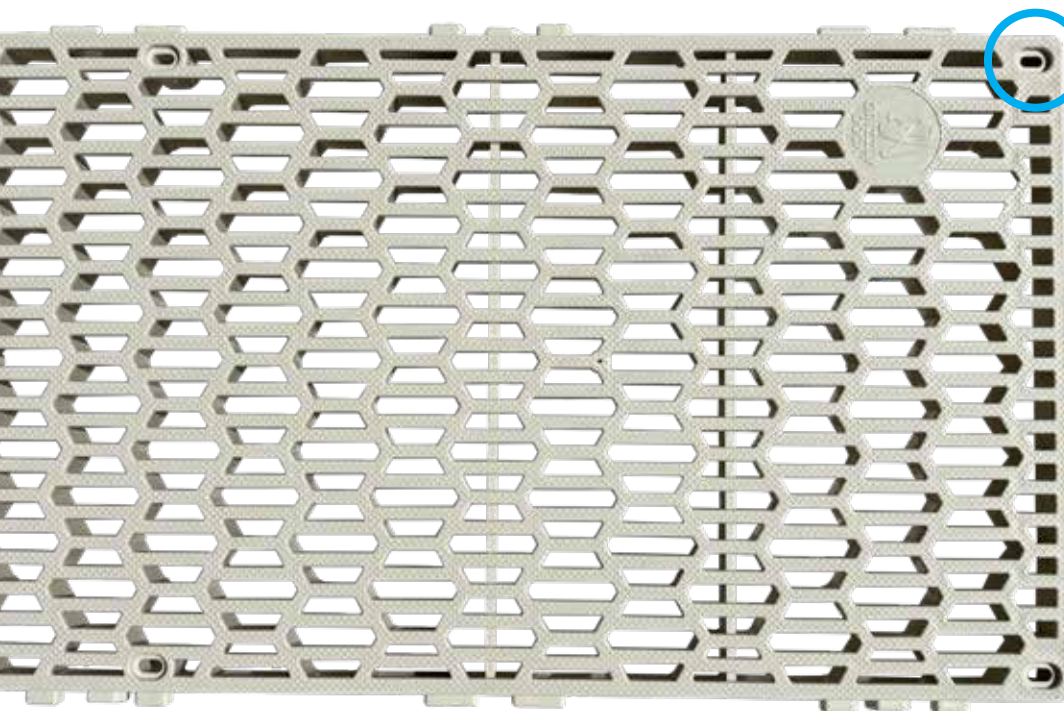


Pre-engineered fasteners
at 16" on center

Installation Instructions

- 1. Prepare the Substructure:** Build your substructure with evenly spaced crossbeams, if required for your application
- 2. Install the First Panel:** Place the first Grizzly Decking panel onto the frame. Secure it with screws, tightening until snug. Avoid over tightening.
- 3. Connect Additional Panels:** Align the next Grizzly Decking panel using the built-in interlocking system. Connect it into place, then fasten it in the same manner as the first panel.
- 4. Continue Installation:** Repeat the process until you reach the desired length of your project, ensuring each panel is properly secured.


Important: Do not install panels vertically over crossbeams, as this leaves them unsupported and prone to damage. Proper alignment ensures lasting performance.

Proper alignment ensures lasting performance.




Build your substructure with evenly spaced cross-members based on your panel size:

4' panels – 16" or 24"
OC
OC = on centre

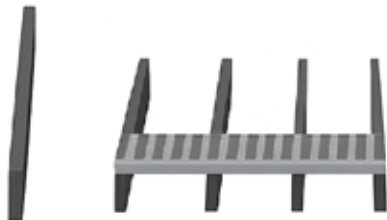

Place your first Grizzly Decking panel onto the frame and secure it with a pan head screw. Tighten until secure – avoid overtightening



Using the built-in interlocking system, snap the next Grizzly Decking panel into place and fasten it just like the first.



Finishing up: Most panels include tabs that can be easily removed with a hand or power saw if desired. Grizzly Decking panels are also available in a convenient no-tab

Laying out the panels first is a great way to check for spacing.

10-Year Warranty

1. Warranty Coverage

- Structural failure due to defects in materials or workmanship.
- Excessive warping, rotting, or splitting under normal residential or light commercial use.
- Significant fading or surface deterioration beyond normal weathering.

2. Exclusions

- Damage caused by improper installation, misuse, neglect, abuse, or accident.
- Damage due to fire, flood, hurricane, tornado, earthquake, or other natural disasters.
- Surface scratches, minor fading, or normal wear and tear.
- Damage caused by contact with chemicals, petroleum-based products, or abrasive materials
- Any modifications or repairs made by unauthorized parties.
- Industrial or heavy commercial use.

3. Conditions of Warranty

- Product must be installed according to Manufacturer's installation guidelines.
- Purchaser must perform routine cleaning and maintenance as described in Manufacturer's care instructions.
- Warranty is void if the product is removed from its original installation location.

4. Warranty Remedies

- Repair the defective product.
- Replace the defective product.
- Refund the original purchase price of the defective portion.
- Replacement materials may differ in color or finish due to natural weathering or product changes.

5. Warranty Claim Procedure

- Provide written notice of the defect within 30 days of discovery.
- Include proof of purchase, installation date, and photographs of the defect.
- Send claim to:
The Metal Ware Corp
Attn: Warranty Department
1700 Monroe St.
Two Rivers, WI, 54241
- Or contact: nescocs@mwcorp.com
1-800-288-45456.

6. Limitation of Liability

- This Warranty is the sole and exclusive warranty for the product.
- Manufacturer is not liable for incidental, special, or consequential damages.
- Any implied warranties, including merchant ability or fitness for a particular purpose, are limited to the duration of this Warranty.

7. Governing Law

- This Warranty shall be governed by the laws of the state of Wisconsin.

